



Tank Division

Specialists in water & chemical Storage

INSTALLATION INSTRUCTIONS FOR SEMI SECTIONAL TANKS


All flange faces must be cleaned and completely dry.

We recommend that a strip of sealer should be fitted between each flange of the tank (ensuring each bolt hole is covered).

Where strips of sealer join together, ensure that there is an effective seal by overlapping the strips a couple of inches.

Check that there are no uneven pressures put on the tank flanges by the bolts before tightening them down.

Bolts should be tightened down evenly going all around the tank 2/3 times before finally tightening down.

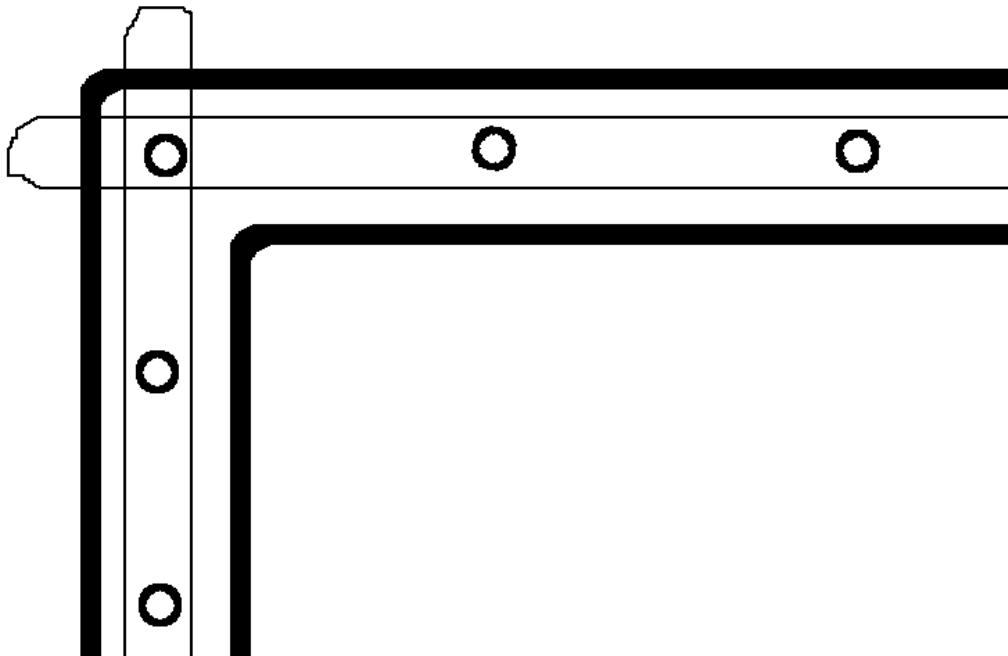

Newport Road, Market Drayton, Shropshire, TF9 2AA
Telephone: 01630 657281 Fax: 01630 655545
Website: www.precolortankdivision.co.uk
E-mail: enquiries@precolortankdivision.co.uk



WRAS
APPROVED
PRODUCT

